

OCTOBER 4, 2013

CORRECTIVE MEASURES STUDY WORK PLAN UPDATE


RAYTHEON COMPANY

(FORMER HUGHES AIRCRAFT COMPANY)

1901 WEST MALVERN AVENUE

FULLERTON, CALIFORNIA

**PREPARED FOR:
RAYTHEON COMPANY**



HARGIS + ASSOCIATES, INC.
HYDROGEOLOGY • ENGINEERING



HARGIS + ASSOCIATES, INC.
HYDROGEOLOGY • ENGINEERING

La Jolla Gateway
9171 Towne Centre Drive, Suite 375
San Diego, CA 92122
Phone: 858.455.6500
Fax: 858.455.6533

October 4, 2013

VIA FEDERAL EXPRESS – STANDARD

Mr. William F. Jeffers, PE
Hazardous Substances Engineer
CALIFORNIA ENVIRONMENTAL PROTECTION AGENCY
DEPARTMENT OF TOXIC SUBSTANCES CONTROL
9211 Oakdale Avenue
Chatsworth, CA 91311-6505


Re: Transmittal of Corrective Measures Study Work Plan Update, Raytheon Company
(former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California

Dear Mr. Jeffers:

Enclosed is one hard copy with a compact disc that contains a copy of the above-referenced report. If you have any questions or require further information, please contact us at 858-455-6500.

Sincerely,


HARGIS + ASSOCIATES, INC.

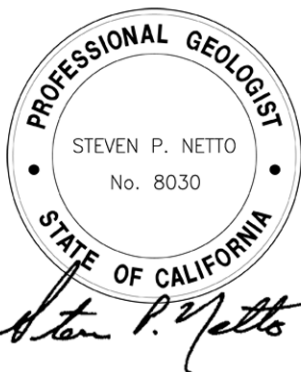

Steven P. Netto, PG 8030, CHG 872
Senior Hydrogeologist

SPN/CGAR/ama

Enclosure: 1 copy w-CD



Christopher G.A. Ross, PG 4594, CHG 221
Principal Hydrogeologist

Other Offices:
Mesa, AZ
Tucson, AZ



Mr. William F. Jeffers, PE
October 4, 2013
Page 2

cc w/encl: (1 copy w-CD)

Mr. Paul Pongetti, Department of Toxic Substances Control, Cypress
Mr. Paul E. Brewer, Raytheon Company
Mr. Carl Bernhardt, California RWQCB, Santa Ana Region
Mr. Dave Mark, Orange County Water District
Mr. Eric Silvers, Regency Centers
Ms. Denise Gerstenberg, Cushman & Wakefield of California, Inc.

(2 copies w-CDs)

Mr. Dave Schickling, City of Fullerton

(via CD only) (Hard Copies Provided Upon Request)

Mr. Chad Blais, City of Fullerton
Mr. Robert Logan, RG, Kennedy/Jenks Consultants
Mr. Harris Sanders, Gateway Environmental Management LLC
Ms. Jennifer Schaefer, The Morgan Group, Inc.
Rosalind McLeroy, Esq., The Morgan Group, Inc.
Mr. Michael Payne, Prudential Real Estate Investors
Ms. Tizita Bekele, PE, Department of Toxic Substances Control, Cypress
Mr. Mike McGee, City of Buena Park
Ms. Carol Owens, The Morgan Group, Inc.

(via Email only)

Mr. Duc Nguyen, Orange County Public Works

CORRECTIVE MEASURES STUDY WORK PLAN UPDATE

RAYTHEON COMPANY
(FORMER HUGHES AIRCRAFT COMPANY)
1901 WEST MALVERN AVENUE
FULLERTON, CALIFORNIA

TABLE OF CONTENTS

Section	Page
ACRONYMS AND ABBREVIATIONS.....	iii
1.0 INTRODUCTION.....	1
1.1 PURPOSE AND SCOPE	1
1.2 BACKGROUND.....	2
1.2.1 Subject Areas of Corrective Action	3
1.2.1.1 Building 609 Overview.....	3
1.2.1.2 Building 601 Overview.....	4
1.2.2 Supporting CMS Activities.....	5
1.2.2.1 Groundwater Monitoring and Assessment.....	5
1.2.2.2 Bench and Pilot Testing	6
1.2.2.3 Groundwater Modeling.....	8
2.0 REMEDIAL ACTION OBJECTIVES	9
3.0 CORRECTIVE MEASURES ALTERNATIVES	10
4.0 CORRECTIVE MEASURES ALTERNATIVE EVALUATION CRITERIA	12
4.1 PROTECTION OF HUMAN HEALTH AND THE ENVIRONMENT	12
4.2 EFFECTIVENESS.....	12
4.3 REDUCTION OF TOXICITY, MOBILITY, AND VOLUME/MASS.....	13
4.4 IMPLEMENTABILITY.....	13
4.5 COST.....	13
4.6 GREEN AND SUSTAINABLE.....	13
5.0 CORRECTIVE MEASURES STUDY TASKS	15
5.1 COMPLETE GROUNDWATER ASSESSMENT	15
5.2 CONTINUE PILOT TESTING	16
5.3 GROUNDWATER MODEL AND CONCEPTUAL SITE MODEL DOCUMENTATION	16
5.4 PREPARE CORRECTIVE MEASURES STUDY REPORT.....	16
6.0 PROJECT ORGANIZATION.....	18
7.0 PROJECT SCHEDULE.....	19
8.0 REFERENCES.....	20

TABLE OF CONTENTS (continued)

FIGURES

Figure		Drawing Number
1	SITE LOCATION	410-8281 A
2	WELL AND PIEZOMETER LOCATIONS	410-9054 A
3	WATER LEVEL AND WATER QUALITY UNIT B, AUGUST 2013	220-2199 A
4	REGIONAL CONCEPTUAL GROUNDWATER MODEL, HYDROGEOLOGIC CROSS –SECTION C-C'	310-1205 A
5	TENTATIVE CORRECTIVE MEASURES STUDY SCHEDULE	--

APPENDICES

Appendix

A	CORRECTIVE MEASURES STUDY REPORT OUTLINE
---	--

ACRONYMS AND ABBREVIATIONS

1,1-DCE	1,1-dichloroethylene
AOP	advanced oxidation process
CACA	Corrective Action Consent Agreement
CMS	Corrective Measures Study
COCs	compounds of concern
DTSC	California Environmental Protection Agency, Department of Toxic Substances Control
former property	293 acre portion of Site sold in 1998
gpm	gallons per minute
H+A	Hargis + Associates, Inc.
HHRAs	Human Health Risk Assessment
HiPOx™	peroxide and ozone
HAC	Hughes Aircraft Company
MNA	Monitored Natural Attenuation
RAOs	Remedial action objectives
Raytheon	Raytheon Company
the Site	1901 West Malvern Avenue, Fullerton, California
TCE	trichloroethylene
VOCs	Volatile organic compounds



HARGIS + ASSOCIATES, INC.

CORRECTIVE MEASURES STUDY WORK PLAN UPDATE

RAYTHEON COMPANY
(FORMER HUGHES AIRCRAFT COMPANY)
1901 WEST MALVERN AVENUE
FULLERTON, CALIFORNIA

1.0 INTRODUCTION

This Corrective Measures Study (CMS) Work Plan Update has been prepared by Hargis + Associates, Inc. (H+A), on behalf of Raytheon Company (Raytheon) (formerly Hughes Aircraft Company [HAC]) for the site located at 1901 West Malvern Avenue which is northeast of the intersection of Malvern Avenue and Gilbert Street in Fullerton, California (the Site) (Figures 1 and 2). This CMS Work Plan updates the initial CMS Work Plan prepared in 2003 (H+A, 2003a) to provide current status and schedule for preparation of the CMS Report and associated tasks as discussed in a meeting with the California Environmental Protection Agency, Department of Toxic Substances Control (DTSC) on September 25, 2013.

1.1 PURPOSE AND SCOPE

A CMS is being conducted to determine appropriate groundwater corrective actions associated with operations at two former areas of the Site (former Building 609 area and former Building 601 area) in accordance with the Corrective Action Consent Agreement (CACA) with the DTSC (DTSC, 2003). The purpose of the CMS is to identify and evaluate a corrective measure alternative(s) that will address regional groundwater containing volatile organic compounds (VOCs) and 1,4-dioxane at and downgradient of the former property. For the purposes of this document the term “former property” refers to the approximate 293 acre portion of the former HAC Facility sold by Raytheon in 1998.

The purpose of this CMS Work Plan Update is to describe the current plan and schedule to evaluate corrective measures alternatives. In accordance with the CACA requirements for a CMS Work Plan, this CMS Work Plan Update includes the following elements:

- Section 1 provides an introduction, the overall purpose of the CMS Work Plan and the CMS, an outline of the scope of this document, and a brief background summary of activities completed since the initial 2003 CMS work plan;
- Section 2 presents remedial action objectives (RAOs) for groundwater;
- Section 3 identifies and describes corrective measures alternatives;
- Section 4 outlines the general approach and criteria for evaluating the corrective measures alternatives;
- Section 5 describes tasks being conducted to support the CMS;
- Section 6 summarizes the project organization;
- Section 7 presents a project schedule;
- Section 8 lists references cited; and
- Appendix A is a proposed outline for the CMS report.

1.2 BACKGROUND

This section presents an update to the background section presented in the initial CMS Work Plan prepared in 2003 (H+A, 2003a) and briefly summarizes results of tasks completed since the initial CMS Work Plan was prepared. A summary of previous investigations and Site conditions prior to 2003 are presented in more detail in Appendix A of the 2003 CMS Work Plan. The specific areas subject to the CACA have been identified based on the extensive Resource Conservation and Recovery Act Facility Investigation, subsequent groundwater assessment activities, and also takes into consideration voluntary remediation conducted by Raytheon.

1.2.1 Subject Areas of Corrective Action

As outlined in the initial 2003 CMS Work Plan, there are two specific areas that are being addressed in the CMS:

1. Perched zone water and regional groundwater containing principally 1,1-dichloroethylene (1,1-DCE) and 1,4-dioxane, which, for the purposes of this document, will be collectively referred to as the former Building 609 area.
2. Regional groundwater containing principally trichloroethylene (TCE) and 1,1-DCE, which, for the purposes of this document, will be referred to as the former Building 601 area.

1.2.1.1 Building 609 Overview

The Building 609 area included three subsurface features where impacts were observed: 1) soil from land surface to approximately 80 feet below former grade (the source area); 2) a perched zone extending from under the source area approximately 600 to 800 feet to the south; and 3) regional groundwater from the toe of the perched zone extending to the west of the former property boundary. The source area, also known as Solid Waste Management Unit 3, and the perched zone were the subject of voluntary remediation conducted by Raytheon.

As outlined in the initial 2003 CMS Work Plan, the source area remediation was completed prior to 2001 and will not be part of the CMS based on the Human Health Risk Assessments (HHRAs), soil assessment, and data collected during operation of the voluntary source remediation program.

As outlined in the initial 2003 CMS Work Plan, prior remediation and results of HHRAs indicate that the potential exposure pathway associated with the perched zone is related to continued migration of post remediation residual VOCs and 1,4-dioxane near the toe of the perched zone to the regional groundwater. This pathway will be addressed as part of the regional groundwater corrective action and further perched zone remediation will not be part of the CMS.

VOCs and 1,4-dioxane have been detected in groundwater samples collected from monitor wells near the toe of the perched zone and appear to extend in the regional groundwater system to west/southwest of monitor well MW-36, which is located approximately 8,000 feet west of the former property boundary along Malvern Avenue (Figure 3). The results of recently completed groundwater assessment are documented in a well construction report (H+A, in press). VOCs and 1,4-dioxane dissolved in regional groundwater from the toe of the perched zone to west/southwest of the former property will be considered in the CMS to protect the regional aquifer system and current or future potential production wells (potential receptors).

1.2.1.2 Building 601 Overview

The Building 601 area included two subsurface areas where impacts were observed: 1) soil from land surface to approximately 120 feet below former grade (the source area); and 2) regional groundwater from the source area extending to the west of the former property boundary. Perched groundwater was not encountered in this area of the Site.

As outlined in the initial 2003 CMS Work Plan, the source area will not be part of the CMS based on the HHRAs, soil assessment, and prior assessments.

As outlined in the initial 2003 CMS, TCE and/or 1,1-DCE have been detected in groundwater samples collected from monitor wells MW-8 (adjacent to the source area) and MW-15 (downgradient of the source area). Subsequent samples collected from monitor well MW-8 also contained 1,4-dioxane; however, these detections were associated with a historical high water level and appear to be associated with the former Building 609 area. Subsequent assessment also indicated detection of relatively low concentrations of TCE in monitor wells near the southwest corner of the former property and in monitor wells to the west of the former property. In general, the TCE from the former Building 601 area appears to be commingled with the former Building 609 area 1,1-DCE and 1,4-dioxane to the west of the former property. As such, VOCs from the former Building 601 area will be considered in the CMS concurrent with the former Building 609 area to protect the regional aquifer system at current or future hypothetical receptors.



1.2.2 Supporting CMS Activities

The following tasks have been conducted in accordance with CMS and Groundwater Assessment work plans and associated addenda since the initial 2003 CMS Work Plan was prepared:

- Groundwater monitoring and assessment from 2003 to present;
- Bench and pilot testing of groundwater treatment technologies from 2004 to present; and
- Groundwater modeling.

1.2.2.1 Groundwater Monitoring and Assessment

Routine groundwater monitoring has been conducted at the Site since 2003 and has been documented in periodic monitoring reports and data submittals. The following outlines groundwater assessment activities conducted to support the CMS since 2003.

- Between late 2003 and early 2004, deep exploratory boreholes and monitor wells were installed on the southern portion of the former property to assess regional groundwater conditions, refine the conceptual site model and improve the monitor well network (H+A, 2003b, 2003c, 2004a, 2004c, and 2004d). The results of these investigations were summarized in a report which presented two potential groundwater conceptual model alternatives (H+A, 2005c).
- In December 2007, there was a detection of 1,1-DCE and 1,4-dioxane in monitor well MW-26C (H+A, 2008a). Based on this detection and other data collected at the Site, one of the two conceptual models presented in the 2005 groundwater assessment report was determined to more accurately represent Site conditions (H+A, 2008b). This conceptual model indicated that there was a structural fold that provided a groundwater transport pathway (aka Unit B or target zone) within the regional groundwater system, which became the focus of subsequent investigations.
- Between 2008 and 2013, multiple phases of groundwater assessment have been conducted on and to the west/southwest of the former property as outlined in multiple

groundwater work plan addenda (H+A, 2008b, 2008c, 2008d, 2009a, 2009c, 2010a, 2011a, 2011c, and 2013a). The results of the multiple groundwater assessment phases indicated that VOCs and 1,4-dioxane were detected primarily within Unit B on the southwestern portion of the former property and to the west/southwest of the property (Figure 3). The presence of a structural fold roughly parallel with Malvern Avenue creates a condition where Unit B slopes to the south from the toe of the perched zone, where the bottom of this zone is approximately 180 feet below land surface, to Malvern Avenue, where the bottom of this zone is approximately 1,000 feet below land surface (Figure 4).

The results of the most recent groundwater assessment are currently being summarized in a monitor well installation report and work plan addendum (HA, in press). As discussed during the September 25, 2013 meeting with DTSC, the groundwater assessment is substantially complete with the exception of a relatively small data gap in the vicinity of monitor wells MW-37 and MW-38. This data gap will be resolved concurrently with CMS Report preparation.

1.2.2.2 Bench and Pilot Testing

Multiple groundwater pilot tests have been conducted at the Site starting in 2004. The pilot groundwater extraction and treatment system has reduced the mass of VOCs and 1,4-dioxane in the regional groundwater and has substantially reduced mass flux along the western portion of the former property. As of the end of August 2013, 79,141,034 gallons of groundwater has been extracted and approximately 121 pounds of VOCs and 22 pounds of 1,4-dioxane have been treated. The pilot system is being upgraded and will continue operations concurrent with CMS evaluations. The following outlines the pilot testing activities.

- In 2004, a pilot test of an advanced oxidation process (AOP) that uses peroxide and ozone (HiPOx™) to treat extracted groundwater was completed (H+A, 2004b and 2004e). Between 2005 and 2007, work plan preparation, and design and permitting of a pilot test involving extraction and treatment of groundwater from two wells screened within the regional groundwater system near the toe of the perched zone was completed (H+A, 2005a, 2005b, 2005d, and 2006). Construction of the pilot test treatment system was completed in 2008 and the treatment system was started in July 2008

(H+A, 2008e). From July 2008 through November 2009, the pilot system was operated with extraction wells EW-01 and MW-21 operating at a combined rate of approximately 20 gallons per minute (gpm) on a nearly continuous basis.

- In 2009, a work plan to expand the pilot treatment system to include a new extraction well, EW-02, located near the western portion of the former property was prepared (H+A, 2009b). Pilot system expansion took place between November 2009 and March 2010 to incorporate extraction well EW-02 into the extraction well network (H+A, 2010a and 2010b). During this time, the pilot test treatment equipment was also modified to increase the treatment system capacity from 20 gpm to 50 gpm, which is the maximum allowable flowrate in accordance with the sewer discharge permit. Beginning in March 2010, the pilot test system was operated near the maximum capacity of approximately 50 gpm on a nearly continuous basis from extraction well EW-02.
- In 2011 and 2012, a bench and pilot test work plan was prepared and implemented to test additional groundwater treatment technologies because the existing HiPOx™ AOP treatment system periodically resulted in formation of bromate above drinking water standards (H+A, 2011b and 2012). The results of the bench and pilot testing indicated that the three technologies evaluated were capable of treating VOCs and 1,4-dioxane without the formation of bromate above drinking water standards.

In 2013, a pilot test addendum was prepared to replace the existing AOP technology with one of the bench tested AOP technologies to monitor and confirm treatment system performance; and add an existing well (MW-29) to the extraction wellfield to enhance containment of higher concentration VOCs and 1,4-dioxane along the west side of the former property (H+A, 2013b). As discussed during the September 25, 2013 meeting with DTSC, the bench and pilot testing of groundwater treatment technologies is substantially complete with the exception of the construction and installation of the modified pilot treatment system and connection of the existing monitor well (MW-29) to the treatment system. The construction and operation of the modified pilot groundwater extraction and treatment system will be implemented concurrently with CMS Report preparation and the results of operation and monitoring will be available in advance of preparation of the full-scale treatment system design which is part of Corrective Measures Implementation.

1.2.2.3 Groundwater Modeling

As outlined in the initial 2003 CMS Work Plan (H+A, 2003a), groundwater modeling was anticipated to be conducted to support evaluation of corrective measures alternatives. In 2003, the conceptual model of the groundwater system did not anticipate the complexities of the groundwater system which were subsequently defined and refined during groundwater assessment activities. Construction of the numerical flow model was initiated in 2011 and was not completed until late 2012 after the results of groundwater assessment had largely defined the general orientation and configuration of the fold along Malvern Avenue. Calibration of the groundwater flow model was largely completed in 2013. Based on the structural complexities and the highly transient groundwater conditions, solute transport modeling is not planned.

As discussed during the September 25, 2013 meeting with DTSC, the current groundwater flow model is adequate to support evaluation of groundwater corrective action alternatives using capture zone analysis. The model construction and results of calibration will be documented in a technical memorandum along with the current understanding of the Conceptual Site Model. It was agreed that this technical memorandum will be prepared concurrent with CMS Report preparation, but will be submitted prior to CMS Report submittal.

2.0 REMEDIAL ACTION OBJECTIVES

General RAOs for groundwater at the Site are to protect human health and the environment. In the initial 2003 CMS Work Plan it was thought that the extent of VOCs and 1,4-dioxane in regional groundwater was limited to the former property based on the then available data and conceptual model. As described in Section 1.2.2.1, subsequent groundwater assessment has indicated that VOCs and 1,4-dioxane were detected over a greater area of the regional groundwater; as such, the specific RAOs for groundwater are as follows:

- Prevent unacceptable exposure to groundwater containing compounds of concern (COCs)
- Decrease spread of COCs in groundwater to protect current and future uses of groundwater

Corrective measures for groundwater will be evaluated in the CMS Report with respect to the RAOs for groundwater listed above and the following drinking water standards at existing and potential receptors: Federal and California State drinking water Maximum Contaminant Levels and California Notification Levels.


3.0 CORRECTIVE MEASURES ALTERNATIVES

Corrective measures alternatives will be evaluated for groundwater at the Site. Technologies demonstrated to be appropriate at sites with similar compounds of concern will be evaluated to select a preferred corrective measure alternative. As discussed during the September 25, 2013 meeting with DTSC, given the area and depth at which VOCs and 1,4-dioxane have been detected, permeable reactive barriers and in-situ technologies will be screened out early in the CMS Report and the following technologies will be retained: monitored natural attenuation (MNA); institutional controls; and pump and treat. In addition the No Action alternative will be evaluated for comparative purposes.

Monitored natural attenuation requires development of a monitoring program after natural attenuation has been selected as either a portion of or as the entire groundwater correction action. The monitoring program is intended to verify the performance of the corrective action and allow for modifications to the approach, as necessary.

Pump and treat will be evaluated to assess several containment alternatives and will include evaluation of various options for treated water use/disposal. More specifically, the treated water use and disposal options will include: non-potable reuse; reinjection, and/or sewer disposal. VOCs and 1,4-dioxane are the target compounds in groundwater. Based on the concentration of these compounds, the treatment technologies for pump and treat alternatives will be limited to advanced oxidation processes with liquid-phase carbon adsorption. These treatment technologies have been demonstrated to be appropriate at sites with similar compounds of concern and have been/will be subject to bench and/or pilot testing at the Site. The groundwater model developed for the CMS will be used to assess relative capture zones for different pump and treat corrective measures alternatives.

Each of the corrective action alternatives, with the exception of the no action alternative, will also include a description of one or more contingencies that could be implemented to improve the performance of the respective corrective action alternative based on key monitoring data



collected during the Corrective Measures Implementation phase (e.g., performance/point of compliance monitoring wells).

4.0 CORRECTIVE MEASURES ALTERNATIVE EVALUATION CRITERIA

Each corrective measure alternative will be evaluated based on:

- Overall protection of human health and the environment;
- Short- and long-term effectiveness and performance;
- Reduction of toxicity, mobility, and volume or mass through treatment;
- Implementability;
- Cost; and
- Green and Sustainable.

4.1 PROTECTION OF HUMAN HEALTH AND THE ENVIRONMENT

Each corrective measure will be evaluated as to its overall protection of human health and the environment. The corrective measures alternatives will be evaluated to determine the degree to which potential human exposure is minimized or eliminated and the degree to which the groundwater resource is protected or improved.

4.2 EFFECTIVENESS

Each corrective measure alternative will be evaluated for long-term effectiveness by the ability to maintain reliable protection of human health. Likewise each corrective measure alternative will be evaluated for short-term effectiveness by the ability to protect community and workers during construction and implementation. Treated water use/disposal options will be evaluated to determine the ability of each to use/dispose of groundwater at the rate of groundwater extraction.

4.3 REDUCTION OF TOXICITY, MOBILITY, AND VOLUME/MASS

Each corrective measure alternative will be evaluated as to its reduction of toxicity, mobility, and volume or mass. Groundwater flow modeling will be used to project the relative percentage of contaminant mass contained by the various groundwater corrective measures alternatives.

4.4 IMPLEMENTABILITY

Each corrective measure alternative will be evaluated as to its implementability. The implementability evaluation will address the technical and administrative feasibility of implementing each corrective measure alternative. Technical feasibility will be evaluated based on the ability to implement the corrective measure alternative given the existing conditions at and downgradient of the former property. Administrative feasibility will be evaluated based on the ability to obtain permits, gain public acceptance, and receive any off-property access required for the corrective measure alternative.

4.5 COST

Each corrective measure alternative will be evaluated as to its expected cost. A preliminary cost estimate including both capital and operation and maintenance costs will be developed for each corrective measure alternative. The cost estimates will include calculations to determine the preliminary net present value of each corrective measure alternative using a seven percent discount rate.

4.6 GREEN AND SUSTAINABLE

As discussed during the September 25, 2013 meeting with DTSC, the evaluation criteria will focus on end use of treated groundwater, with preference provided to corrective measures alternatives that use treated groundwater for beneficial purposes or return treated water to the regional groundwater system.

5.0 CORRECTIVE MEASURES STUDY TASKS

Multiple tasks have been completed in support of the CMS Report. Generally the completed tasks fall within the following categories: groundwater assessment, bench/pilot testing; and construction of the groundwater flow model. Activities conducted for these tasks were described in Section 1.2.2. The following sections describe remaining CMS tasks that have been developed for evaluation of corrective measures alternatives for the Site. Each task has been designed to conform to the CACA. The additional CMS tasks are as follows:

- Complete groundwater assessment (concurrent with CMS Report preparation)
- Continue pilot testing (concurrent with CMS Report preparation)
- Document groundwater flow model construction (submittal in advance of CMS Report)
- Prepare CMS report (includes use of existing groundwater flow model)

5.1 COMPLETE GROUNDWATER ASSESSMENT

The results of the most recent groundwater assessment are currently being summarized in a monitor well installation report and work plan addendum (H+A, in press). As discussed during the September 25, 2013 meeting with DTSC, the groundwater assessment is substantially complete with the exception of a relatively small data gap in the vicinity of monitor wells MW-37 and MW-38. This data gap will be resolved concurrently with CMS Report preparation. A new monitor well will be installed at the monitor wells MW-37 and MW-38 area. This monitor well will target Unit B, which appears to be between the screened intervals of monitor wells MW-37 and MW-38. The monitor well will be drilled and constructed by mud rotary techniques using methods and procedures documented in previous DTSC-approved work plans and as proposed in the monitor well installation report and groundwater assessment work plan addendum (H+A, in press). The estimated schedule for this task is summarized in Figure 5.



5.2 CONTINUE PILOT TESTING

As discussed during the September 25, 2013 meeting with DTSC, the bench and pilot testing of groundwater treatment technologies is substantially complete with the exception of the construction and installation of the new pilot treatment system and connection of the existing monitor well to the treatment system. The existing AOP technology will be replaced with an Ultraviolet Peroxide AOP technology in late 2013/early 2014 to monitor and confirm treatment system performance and existing monitor well MW-29 will be connected to the extraction wellfield to enhance containment of higher concentration VOCs and 1,4-dioxane along the west side of the former property (H+A, 2013b). The construction and operation of the modified pilot groundwater extraction and treatment system will be implemented concurrently with CMS Report preparation and the results of operation and monitoring will be documented in quarterly data submittals/annual reports. The results will be available in advance of preparation of the full-scale treatment system design which is part of Corrective Measures Implementation (Figure 5).

5.3 GROUNDWATER MODEL AND CONCEPTUAL SITE MODEL DOCUMENTATION

As discussed during the September 25, 2013 meeting with DTSC, the current groundwater flow model is adequate to support evaluation of groundwater corrective action alternatives using capture zone analysis. The model construction and results of calibration will be documented in a technical memorandum along with the current understanding of the Conceptual Site Model. It was agreed that this technical memorandum will be prepared concurrent with CMS Report preparation, but will be submitted prior to CMS Report submittal (Figure 5).

5.4 PREPARE CORRECTIVE MEASURES STUDY REPORT

A draft CMS report will be prepared and submitted to the DTSC for review and comment. The draft CMS report will summarize the results of groundwater flow modeling and include a description of the corrective measures alternatives evaluated and the results of those evaluations. The corrective measure evaluation will be assessed based on the evaluation



criteria, and the preferred corrective measure(s) will be identified. A proposed outline for the CMS report has been prepared (Appendix A). As discussed during the September 25, 2013 meeting with DTSC, the groundwater flow modeling and draft CMS report preparation will be completed within 6 months of DTSC approval of this CMS Work Plan Update (Figure 5).

A final draft CMS report will be prepared to incorporate comments received from DTSC and other agencies, as appropriate.

6.0 PROJECT ORGANIZATION

The project organization outlined in the initial 2003 CMS Work Plan remains the same.



7.0 PROJECT SCHEDULE

The schedule for the CMS Report and associated tasks has been provided (Figure 5). The schedule outlines the proposed timeframe to perform and complete the CMS. The schedule may be modified in conjunction with the DTSC.

To the extent that this CMS Work Plan Update is approved by DTSC in October 2013, it is anticipated that the draft CMS report would be submitted to the DTSC in April 2014 (Figure 5). Within 45 days of receipt of comments from DTSC, a final draft CMS report that responds to DTSC comments will be submitted to DTSC. It is assumed the final draft CMS report will then be ready for public comment.




8.0 REFERENCES

- California Environmental Protection Agency, Department of Toxic Substances Control (DTSC), 2003. Corrective Action Consent Agreement, Raytheon Company, 1901 W. Malvern Ave., Fullerton, California 92634, EPA ID No. CAD063109243. Docket HWCA: P3-01/02-001. January 15, 2003.
- Hargis + Associates, Inc. (H+A), 2003a. Corrective Measures Study Workplan, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. April 25, 2003.
- _____, 2003b. Groundwater Monitoring Work Plan and Sampling and Analysis Plan, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. April 25, 2003.
- _____, 2003c. Additional Groundwater Assessment Work Plan, Revision 1.0, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. April 25, 2003.
- _____, 2004a. Additional Groundwater Assessment Work Plan, Addendum No. 1, Raytheon Company (formerly Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. March 23, 2004.
- _____, 2004b. Groundwater Treatment Pilot Testing Corrective Measures Study Workplan (Revision 1.0), Addendum No. 2, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. April 20, 2004.
- _____, 2004c. Letter from C.G.A. Ross to W.F. Jeffers, DTSC, re Amendment A, Additional Groundwater Assessment Workplan Addendum 1, Former Raytheon Company Site, 1901 West Malvern Avenue, Fullerton, California. June 1, 2004.
- _____, 2004d. Letter from C.G.A. Ross to W.F. Jeffers, DTSC, re Amendment B, Additional Groundwater Assessment Workplan Addendum 1, Former Raytheon Company Site, 1901 West Malvern Avenue, Fullerton, California. July 29, 2004.
- _____, 2004e. Groundwater Treatment Pilot Test Summary Report, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. October 26, 2004.
- _____, 2005a. Letter from Mr. Christopher Ross to Mr. William Jeffers, California Environmental Protection Agency, Department of Toxic Substances Control, re. Addendum No. 3, Groundwater Treatment Pilot Testing, Corrective Measures Study Workplan, for Raytheon Company (Former Hughes Aircraft Company Site), 1901 West Malvern Avenue, Fullerton, California. January 18, 2005

- _____, 2005b. Groundwater Extraction and Treatment System Pilot Testing Corrective Measures Study Workplan, Addendum No. 4, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. March 11, 2005.
- _____, 2005c. Deep Boring and Well Construction and Groundwater Sampling Report, Raytheon Company, 1901 West Malvern Avenue, Fullerton, California. March 28, 2005.
- _____, 2005d. Letter to W. Jeffers, DTSC, from C.Ross, H+A 1,4-Dioxane Bench Test Summary, Extended Pilot Test Contingency Plan, Laboratory Confirmation Sample Test Results, and Additional Sampling Summary Raytheon Company, 1901 West Malvern Avenue, Fullerton, California. October 24, 2005
- _____, 2006. Letter to W. Jeffers, DTSC, from C.Ross, S. Netto, D. Ondic, H+A Response to DTSC Comments to 1,4-Dioxane Bench Test Summary, Extended Pilot Test Contingency Plan, Laboratory Confirmation Sample Test Results, and Additional Sampling Summary, Raytheon Company, 1901 West Malvern Avenue, Fullerton, California. June 15, 2006
- _____, 2008a. Results of Groundwater Monitoring, December 2007, Raytheon Company (former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. January 31, 2008.
- _____, 2008b. Additional Groundwater Assessment Work Plan Addendum No. 2, Raytheon Company (formerly Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. February 1, 2008.
- _____, 2008c. Letter to W. Jeffers, DTSC, from C. Ross and S. Netto, H+A, re Attachment 1, Additional Groundwater Assessment Work Plan, Addendum No. 2, Raytheon Company (former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. February 29, 2008.
- _____, 2008d. Technical Memorandum to W. Jeffers, DTSC, from S. Netto, H+A, re Proposed Location for Downgradient Unit CM1-B Monitor Well, Task 2 of Additional Groundwater Assessment Work Plan, Addendum No. 2, Raytheon Company (former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. September 12, 2008.
- _____, 2008e. Results of Groundwater Monitoring and Groundwater Pilot Testing, Third Quarter 2008, Raytheon Company, 1901 West Malvern Avenue, Fullerton, California. December 23, 2008.
- _____, 2009a. Additional Groundwater Assessment Work Plan Addendum No. 2A, Raytheon Company (formerly Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. March 26, 2009.
- _____, 2009b. Groundwater Extraction and Treatment System Pilot Testing Corrective Measures Study Workplan, Addendum No. 4A, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. March 31, 2009.

- _____, 2009c. Letter to W. Jeffers, DTSC, from C. Ross and S. Netto, H+A, re Summary of Monitor Well MW-31 Construction and Testing (Task 1) and Plan to Install and Test Off-Site Monitor Well MW-32 (Task 2), Raytheon Company (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. October 22, 2009.
- _____, 2010a. Additional Groundwater Assessment Work Plan Addendum No. 3, Raytheon Company (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. October 15, 2010.
- _____, 2010b. Well Construction And Groundwater Sampling Report Additional Groundwater Assessment Primary Transport Zone (Target Zone) And Groundwater Extraction Treatment System Pilot Testing, Raytheon Company (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. November 18, 2010.
- _____, 2011a. Additional Groundwater Assessment Work Plan Addendum No. 4, Raytheon Company (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. April 13, 2011
- _____, 2011b. Groundwater Treatment Bench and Pilot Testing Corrective Measures Study Workplan, Addendum No. 5, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. May 6, 2011.
- _____, 2011c. Letter to W. Jeffers, DTSC, from C. Ross and S. Netto, H+A, re Amendment A, Additional Groundwater Assessment Work Plan Addendum No. 4, Former Raytheon Company Site, 1901 West Malvern Avenue, Fullerton, California. June 6, 2011.
- _____, 2012. Groundwater Extraction and Treatment System Alternative Technology Bench and Pilot Test Summary Report, Raytheon Company, (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. November 30, 2012.
- _____, 2013a. Additional Groundwater Assessment Work Plan Addendum No. 5, Raytheon Company (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. February 22, 2013.
- _____, 2013b. Groundwater Extraction and Treatment System Pilot Testing Corrective Measures Study Workplan Addendum No. 6, Raytheon Company (former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. February 27, 2013.
- _____, 2013, in press. Well Construction And Groundwater Sampling Report Additional Groundwater Assessment Primary Transport Zone (Target Zone), Raytheon Company (Former Hughes Aircraft Company), 1901 West Malvern Avenue, Fullerton, California. In preparation.

May 11, 2011 - 10:09am ADE - T: \2011\500-599\532 Raytheon\Hydrogeology\H+A Base\Maps\410-8281.dwg

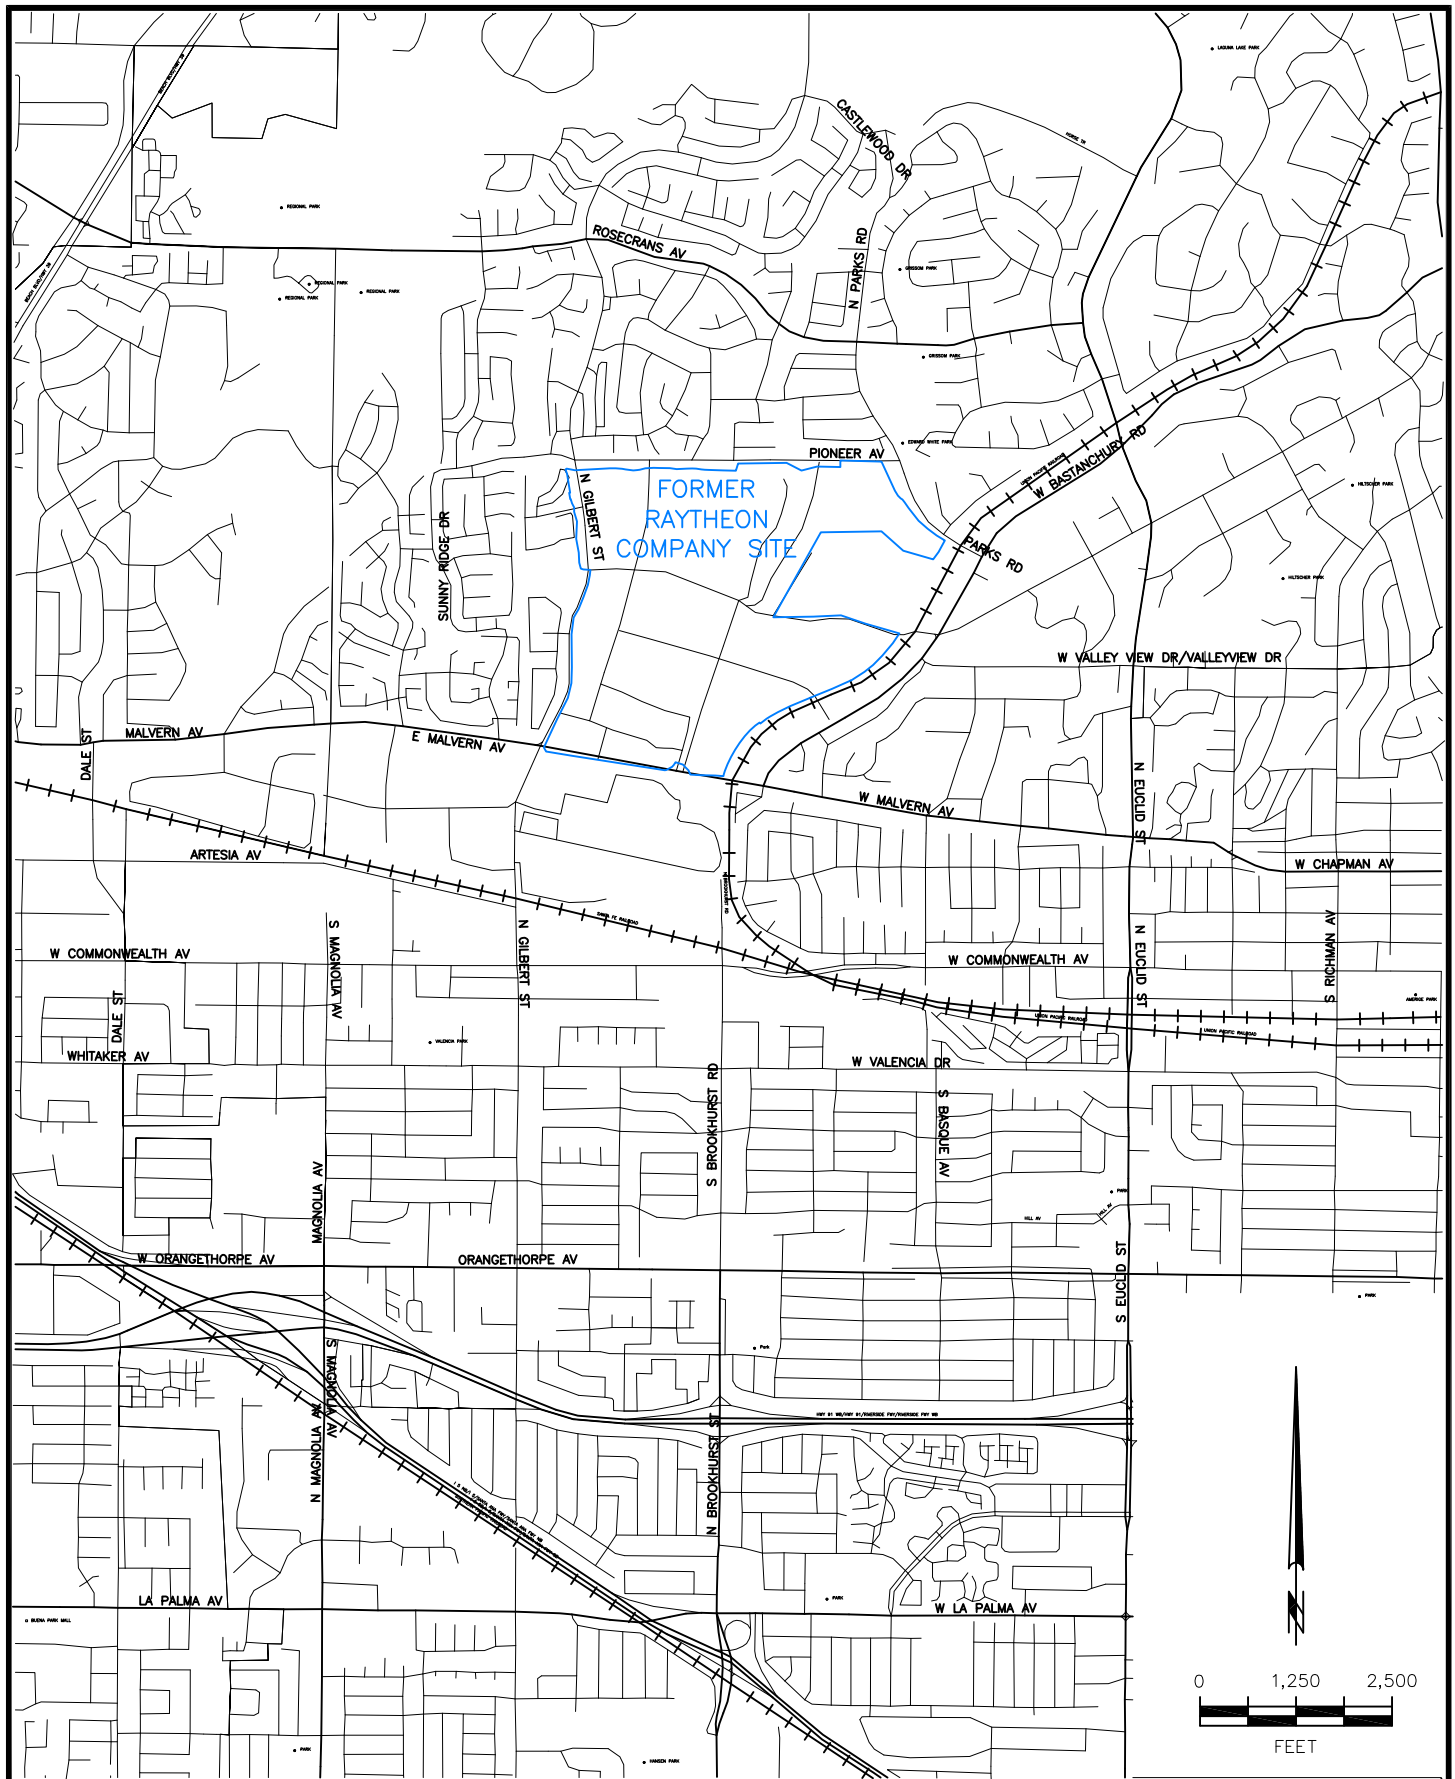

HARGIS+ASSOCIATES, INC.
Hydrogeology/Engineering

FIGURE 1. SITE LOCATION

5/11 | RPT NO. 532.31 | 410-8281 | A

Sep 09, 2013 - 9:57am ADE - T:\2013\500-599\532 Raytheon\Hydrogeology\H+A BaseMaps\410-9054.dwg

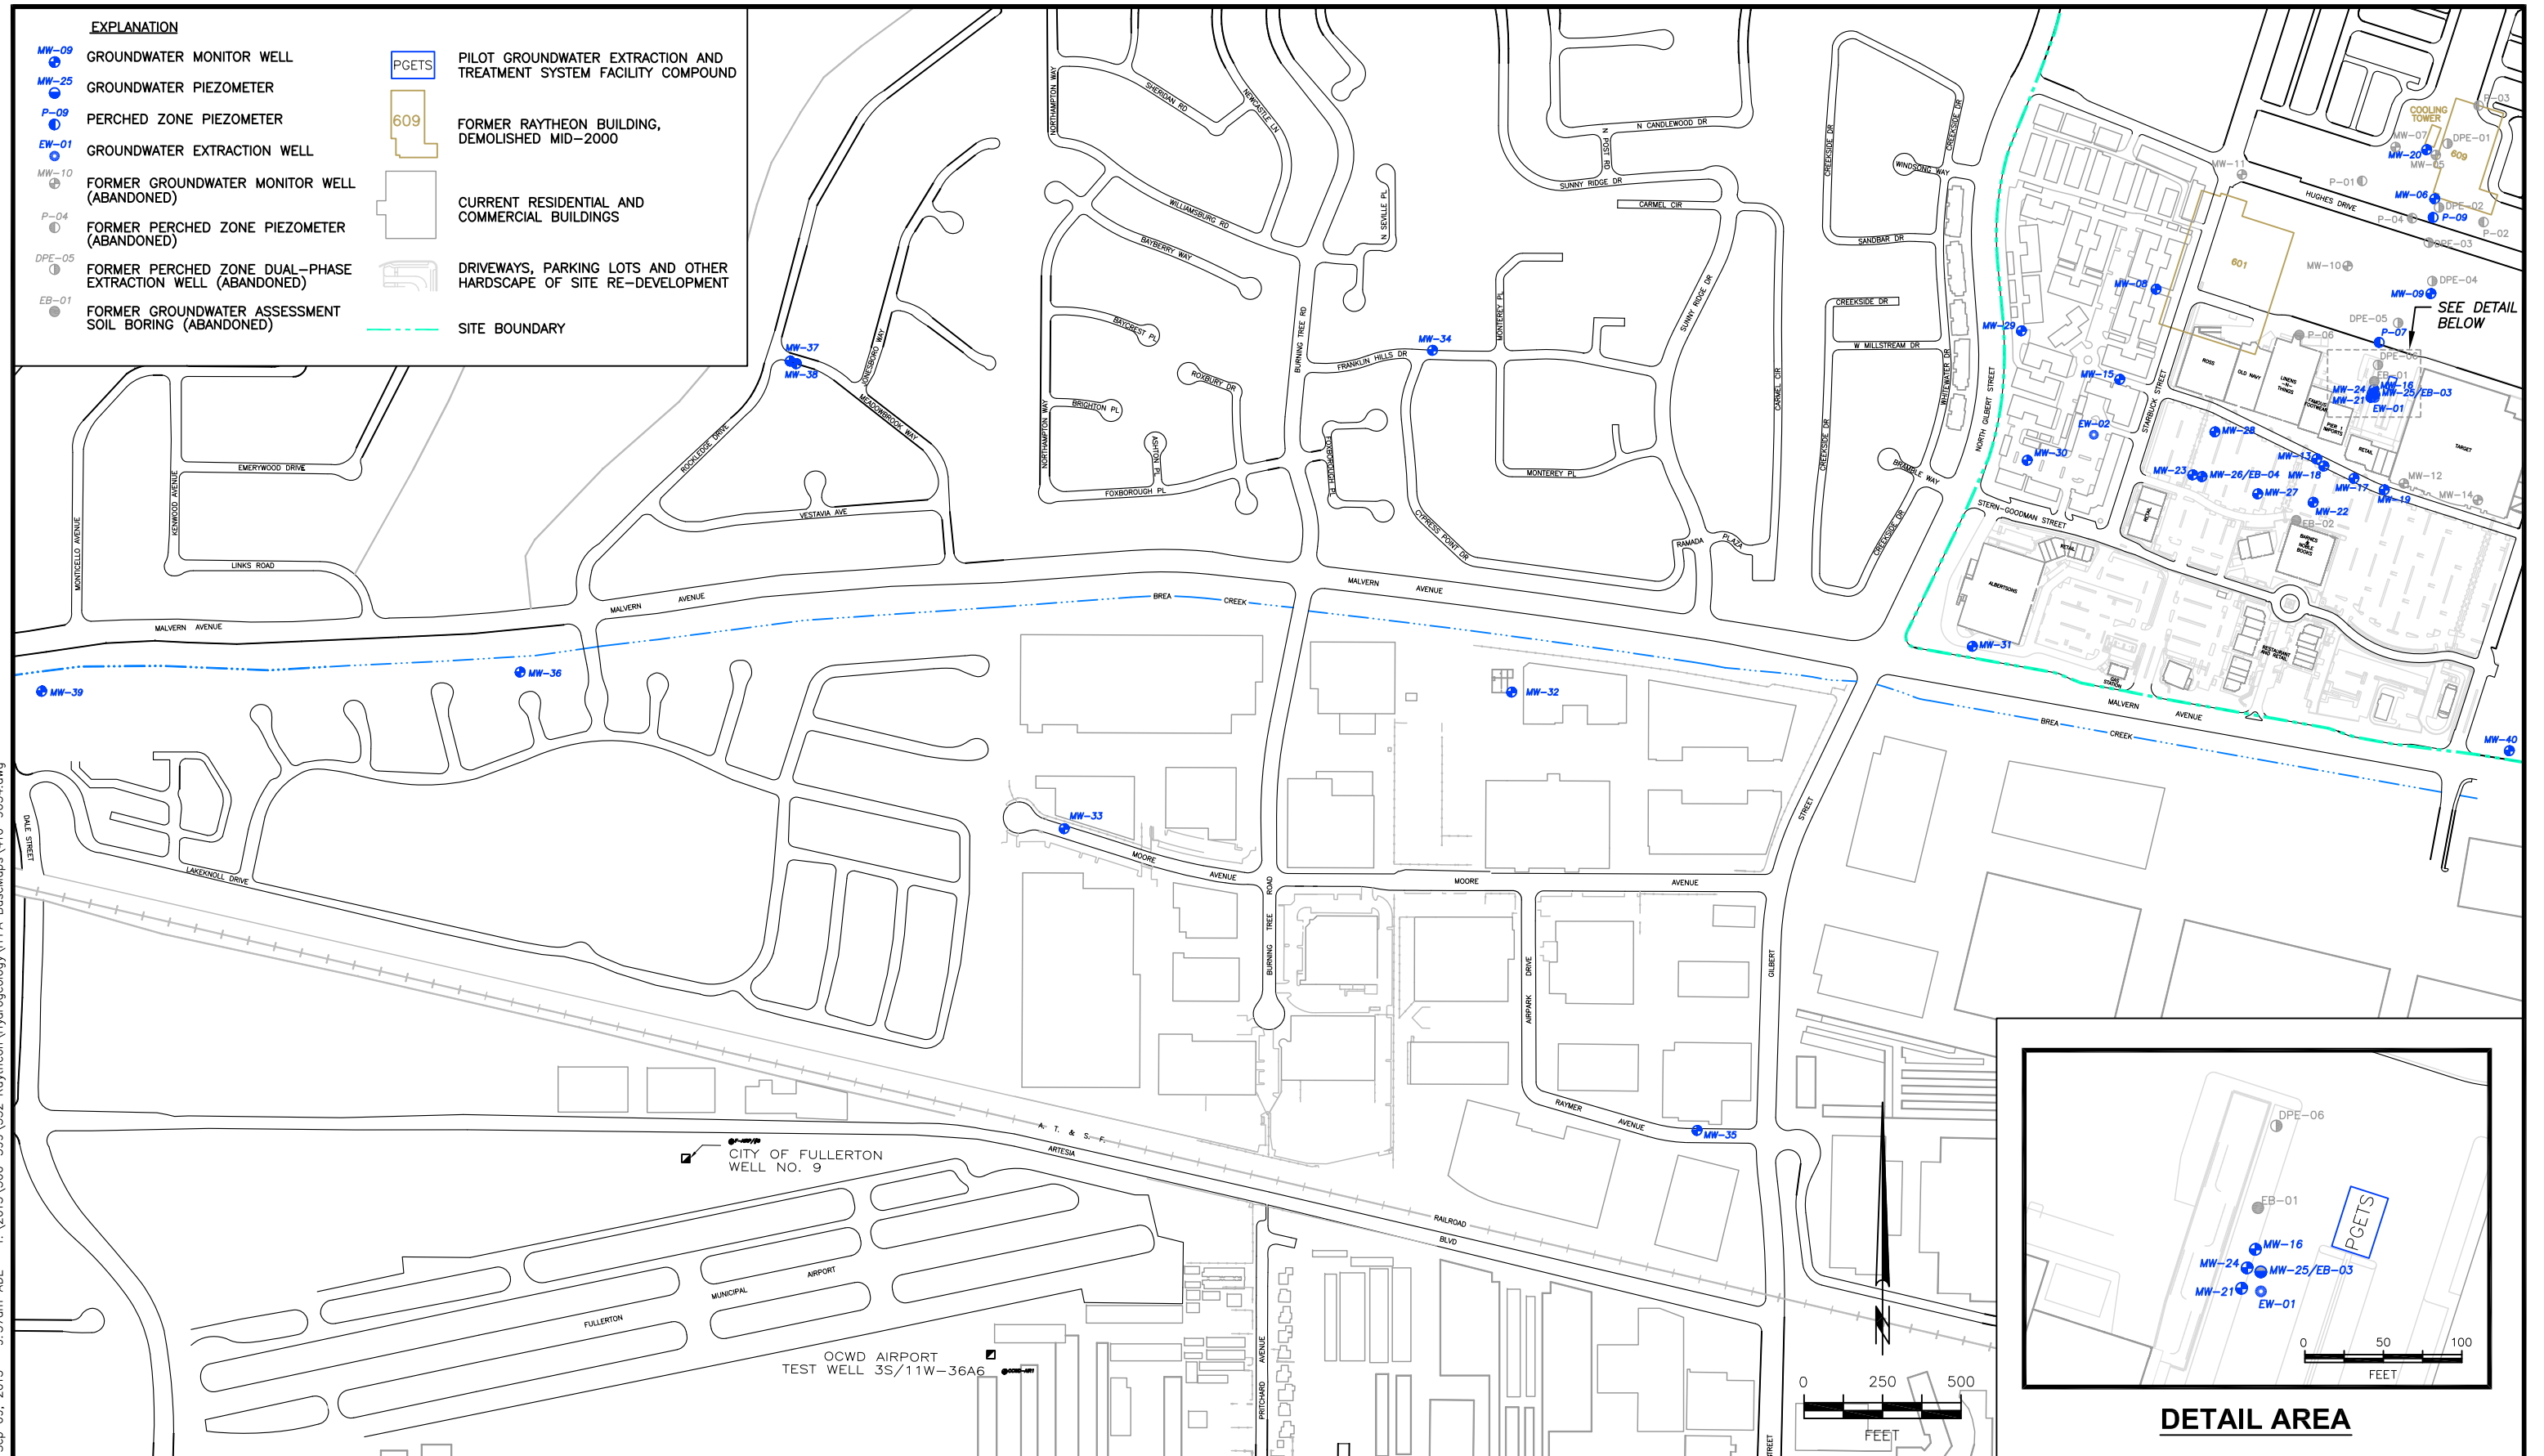


FIGURE 2.
WELL AND PIEZOMETER LOCATIONS

Sep 18, 2013 - 8:47am ADE - T: \\2013\\500-599\\532 Raytheon\\Hydrogeology\\Wate Lv\\220-2199.dwg


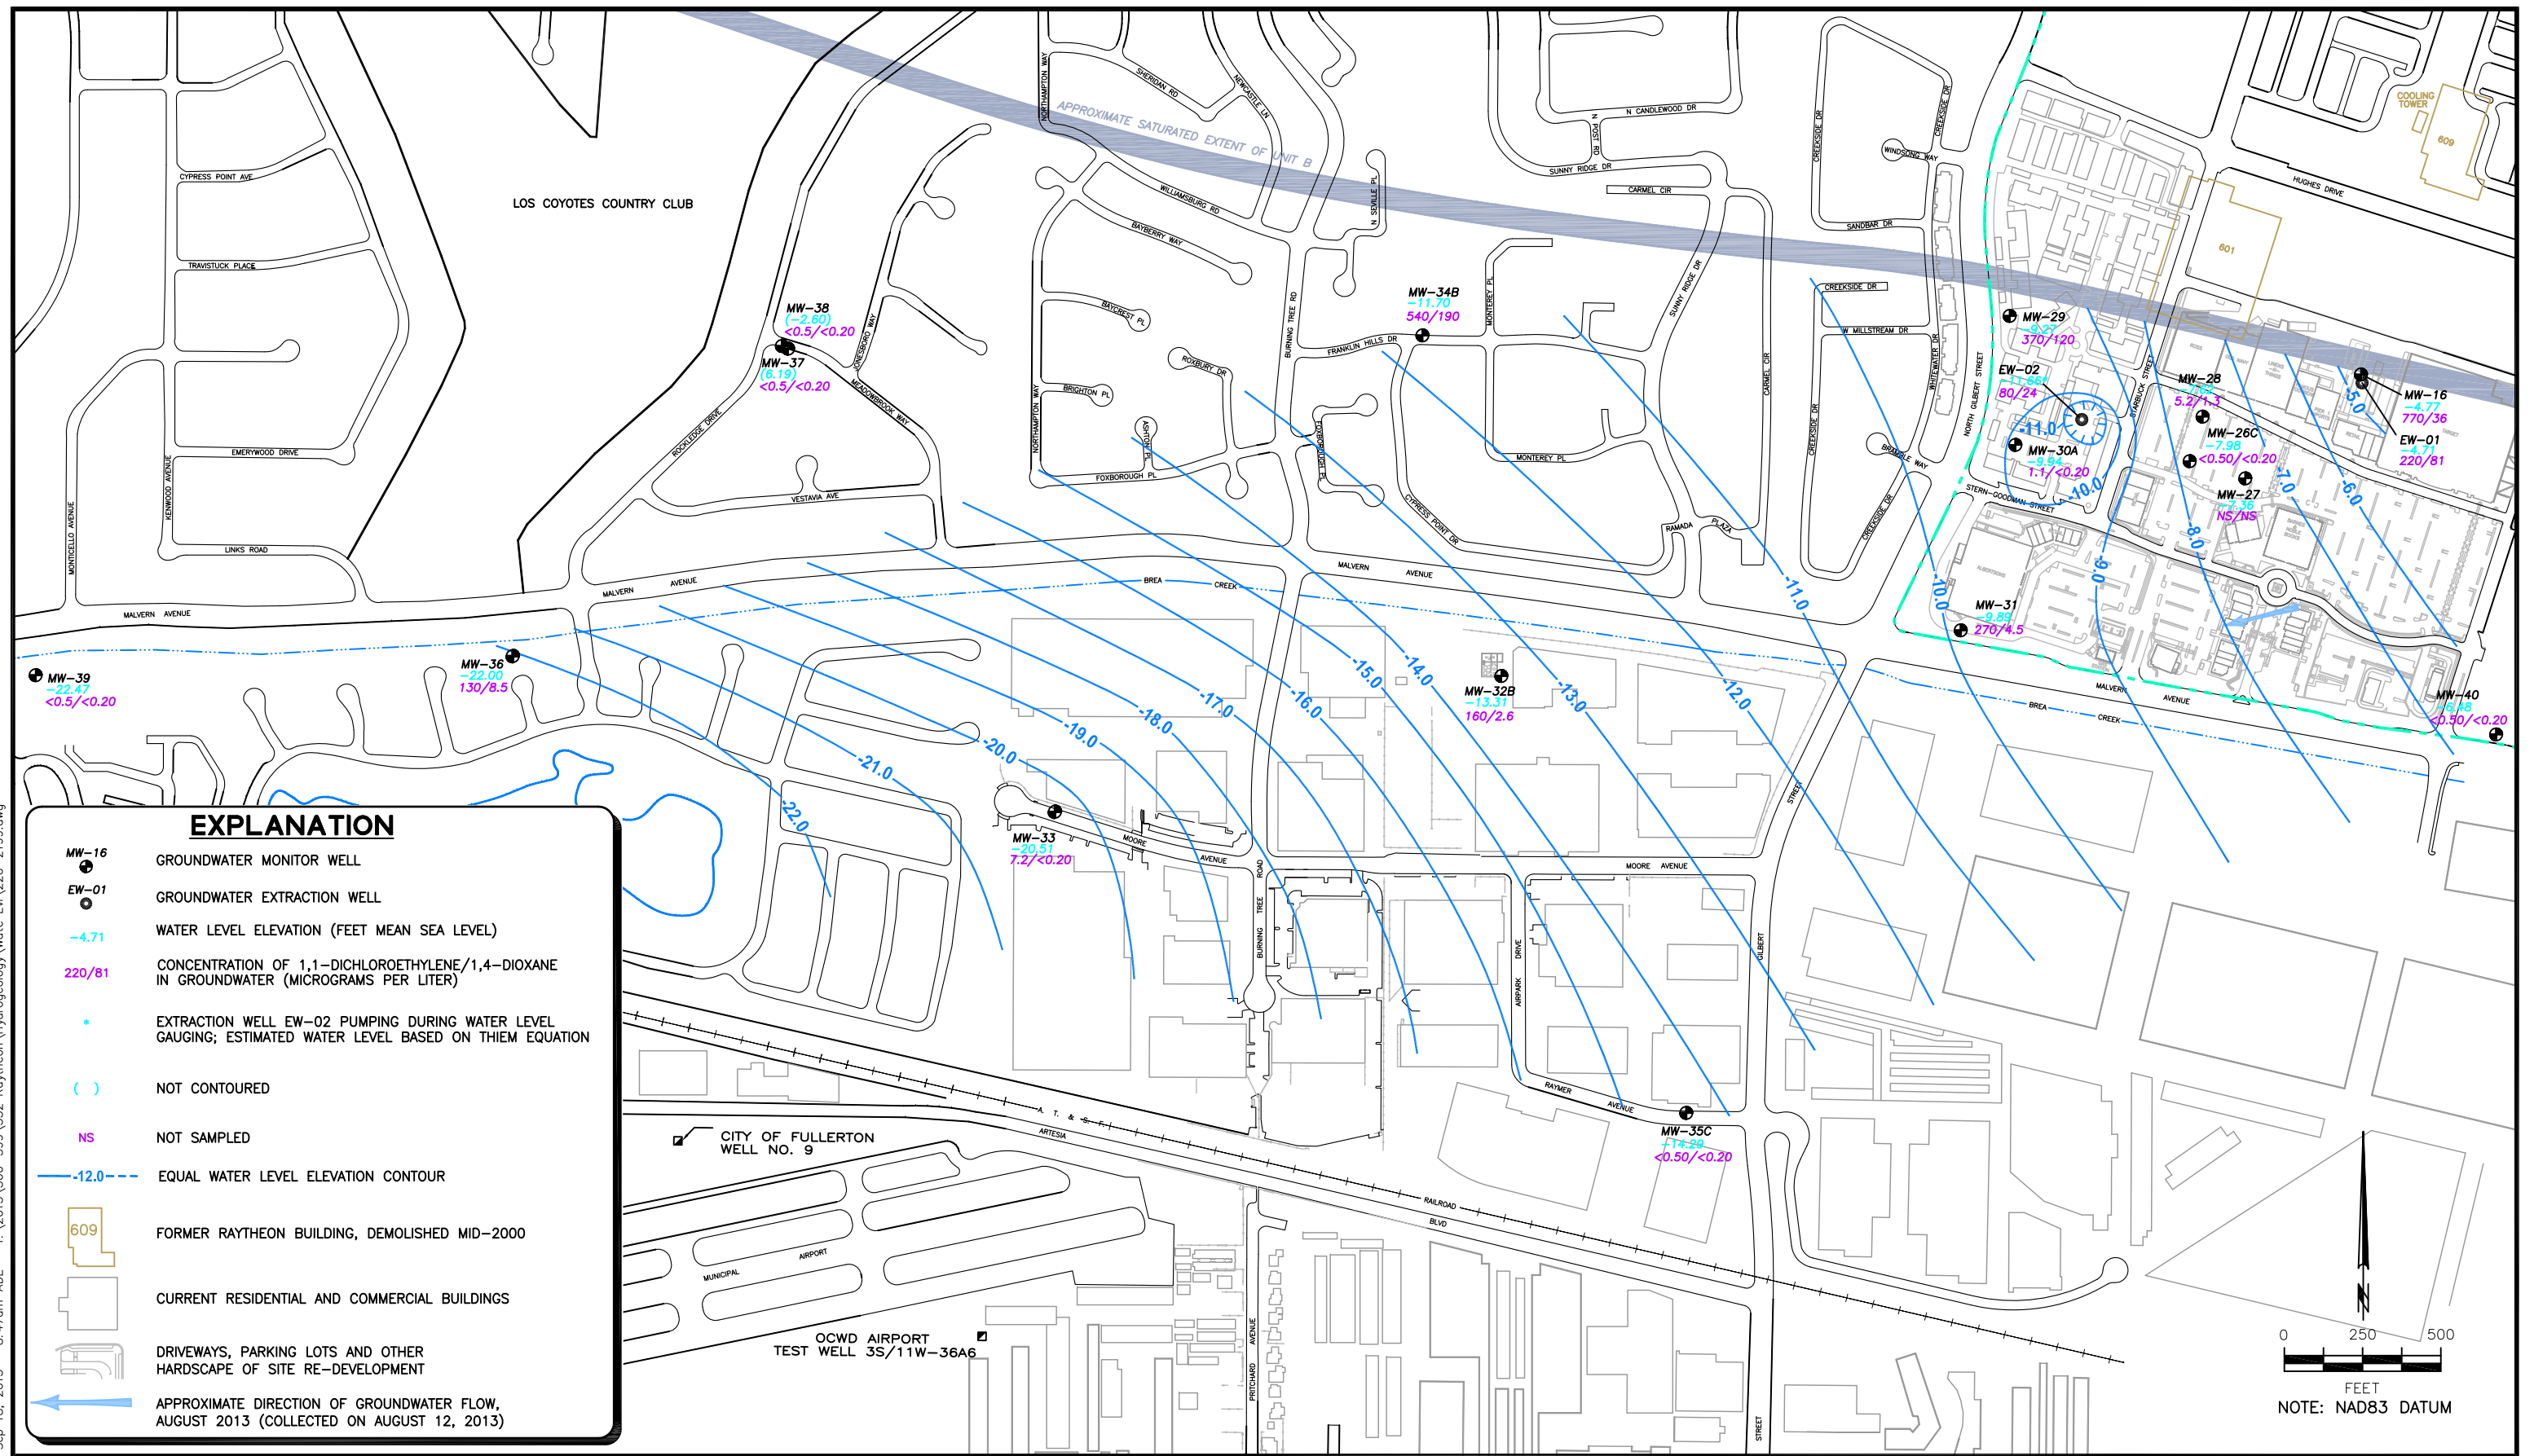



FIGURE 3.
WATER LEVEL AND WATER QUALITY UNIT B
AUGUST 2013

Sep 30, 2013 - 9:23am ADE - T:\2013\500-599\532 Raytheon\Hydrogeology\X-Sections\310-1205.dwg

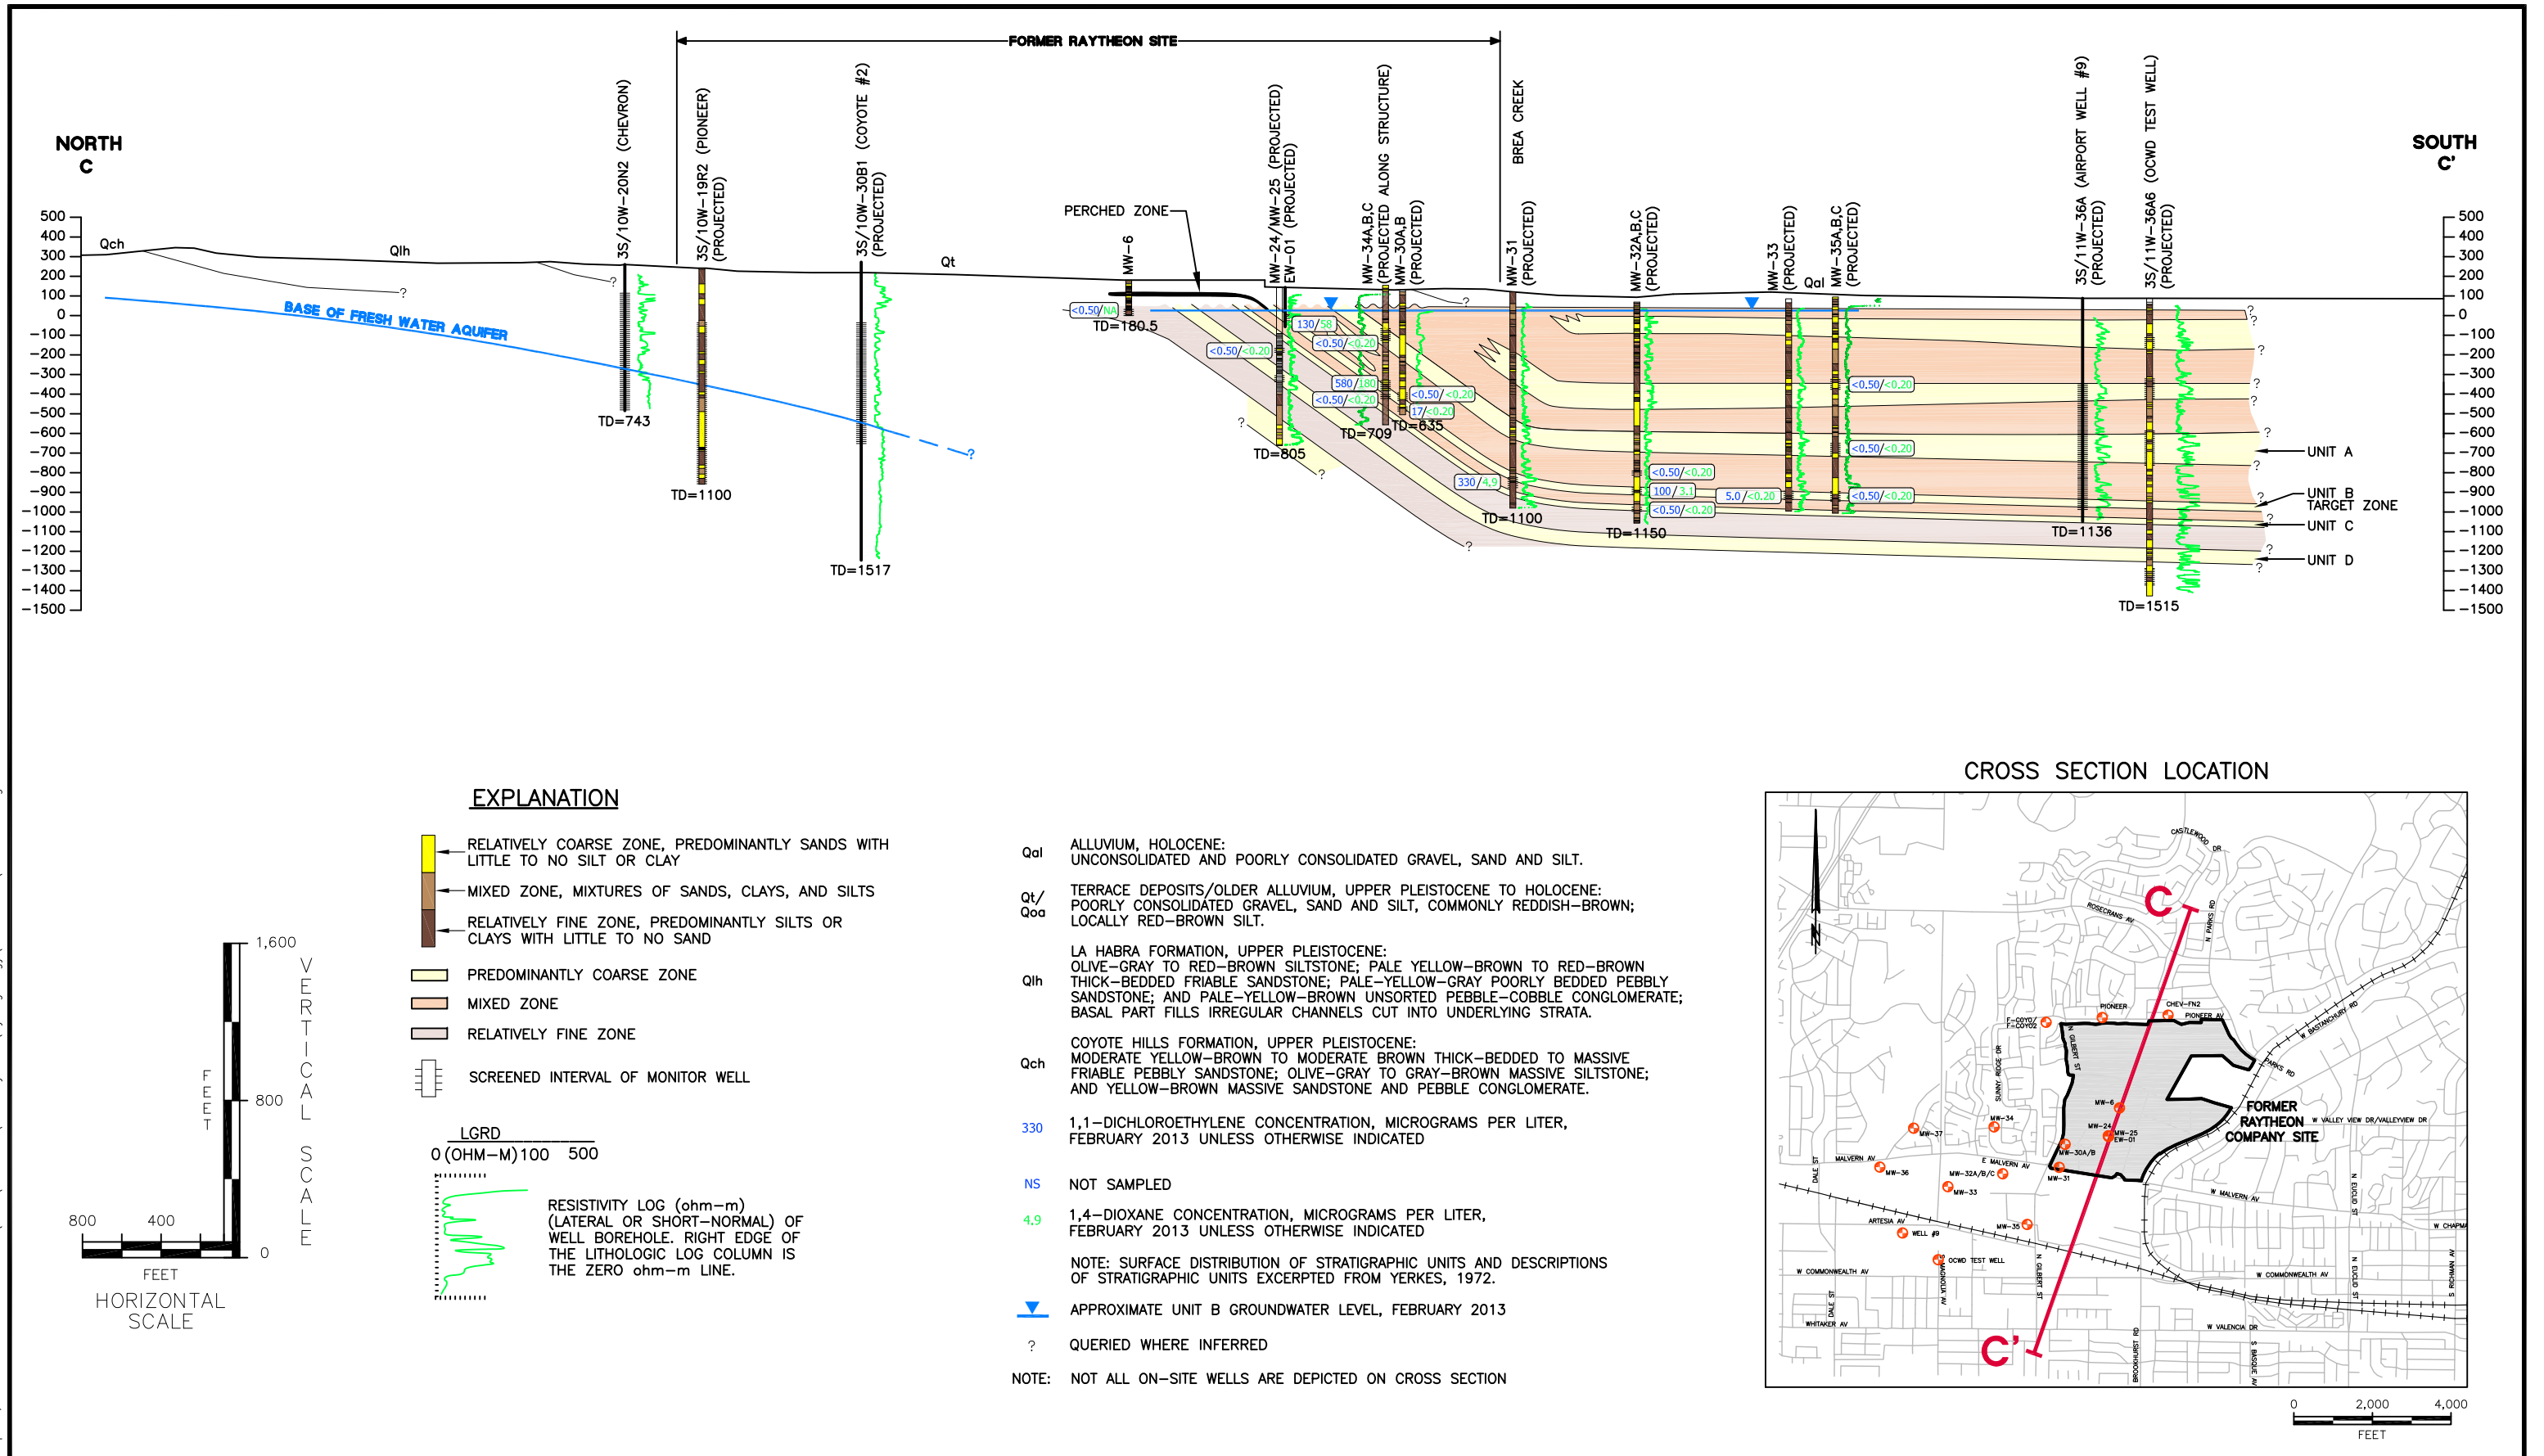

HARGIS+ASSOCIATES, INC.
Hydrogeology/Engineering

FIGURE 4. REGIONAL CONCEPTUAL GROUNDWATER MODEL HYDROGEOLOGIC CROSS-SECTION C-C'

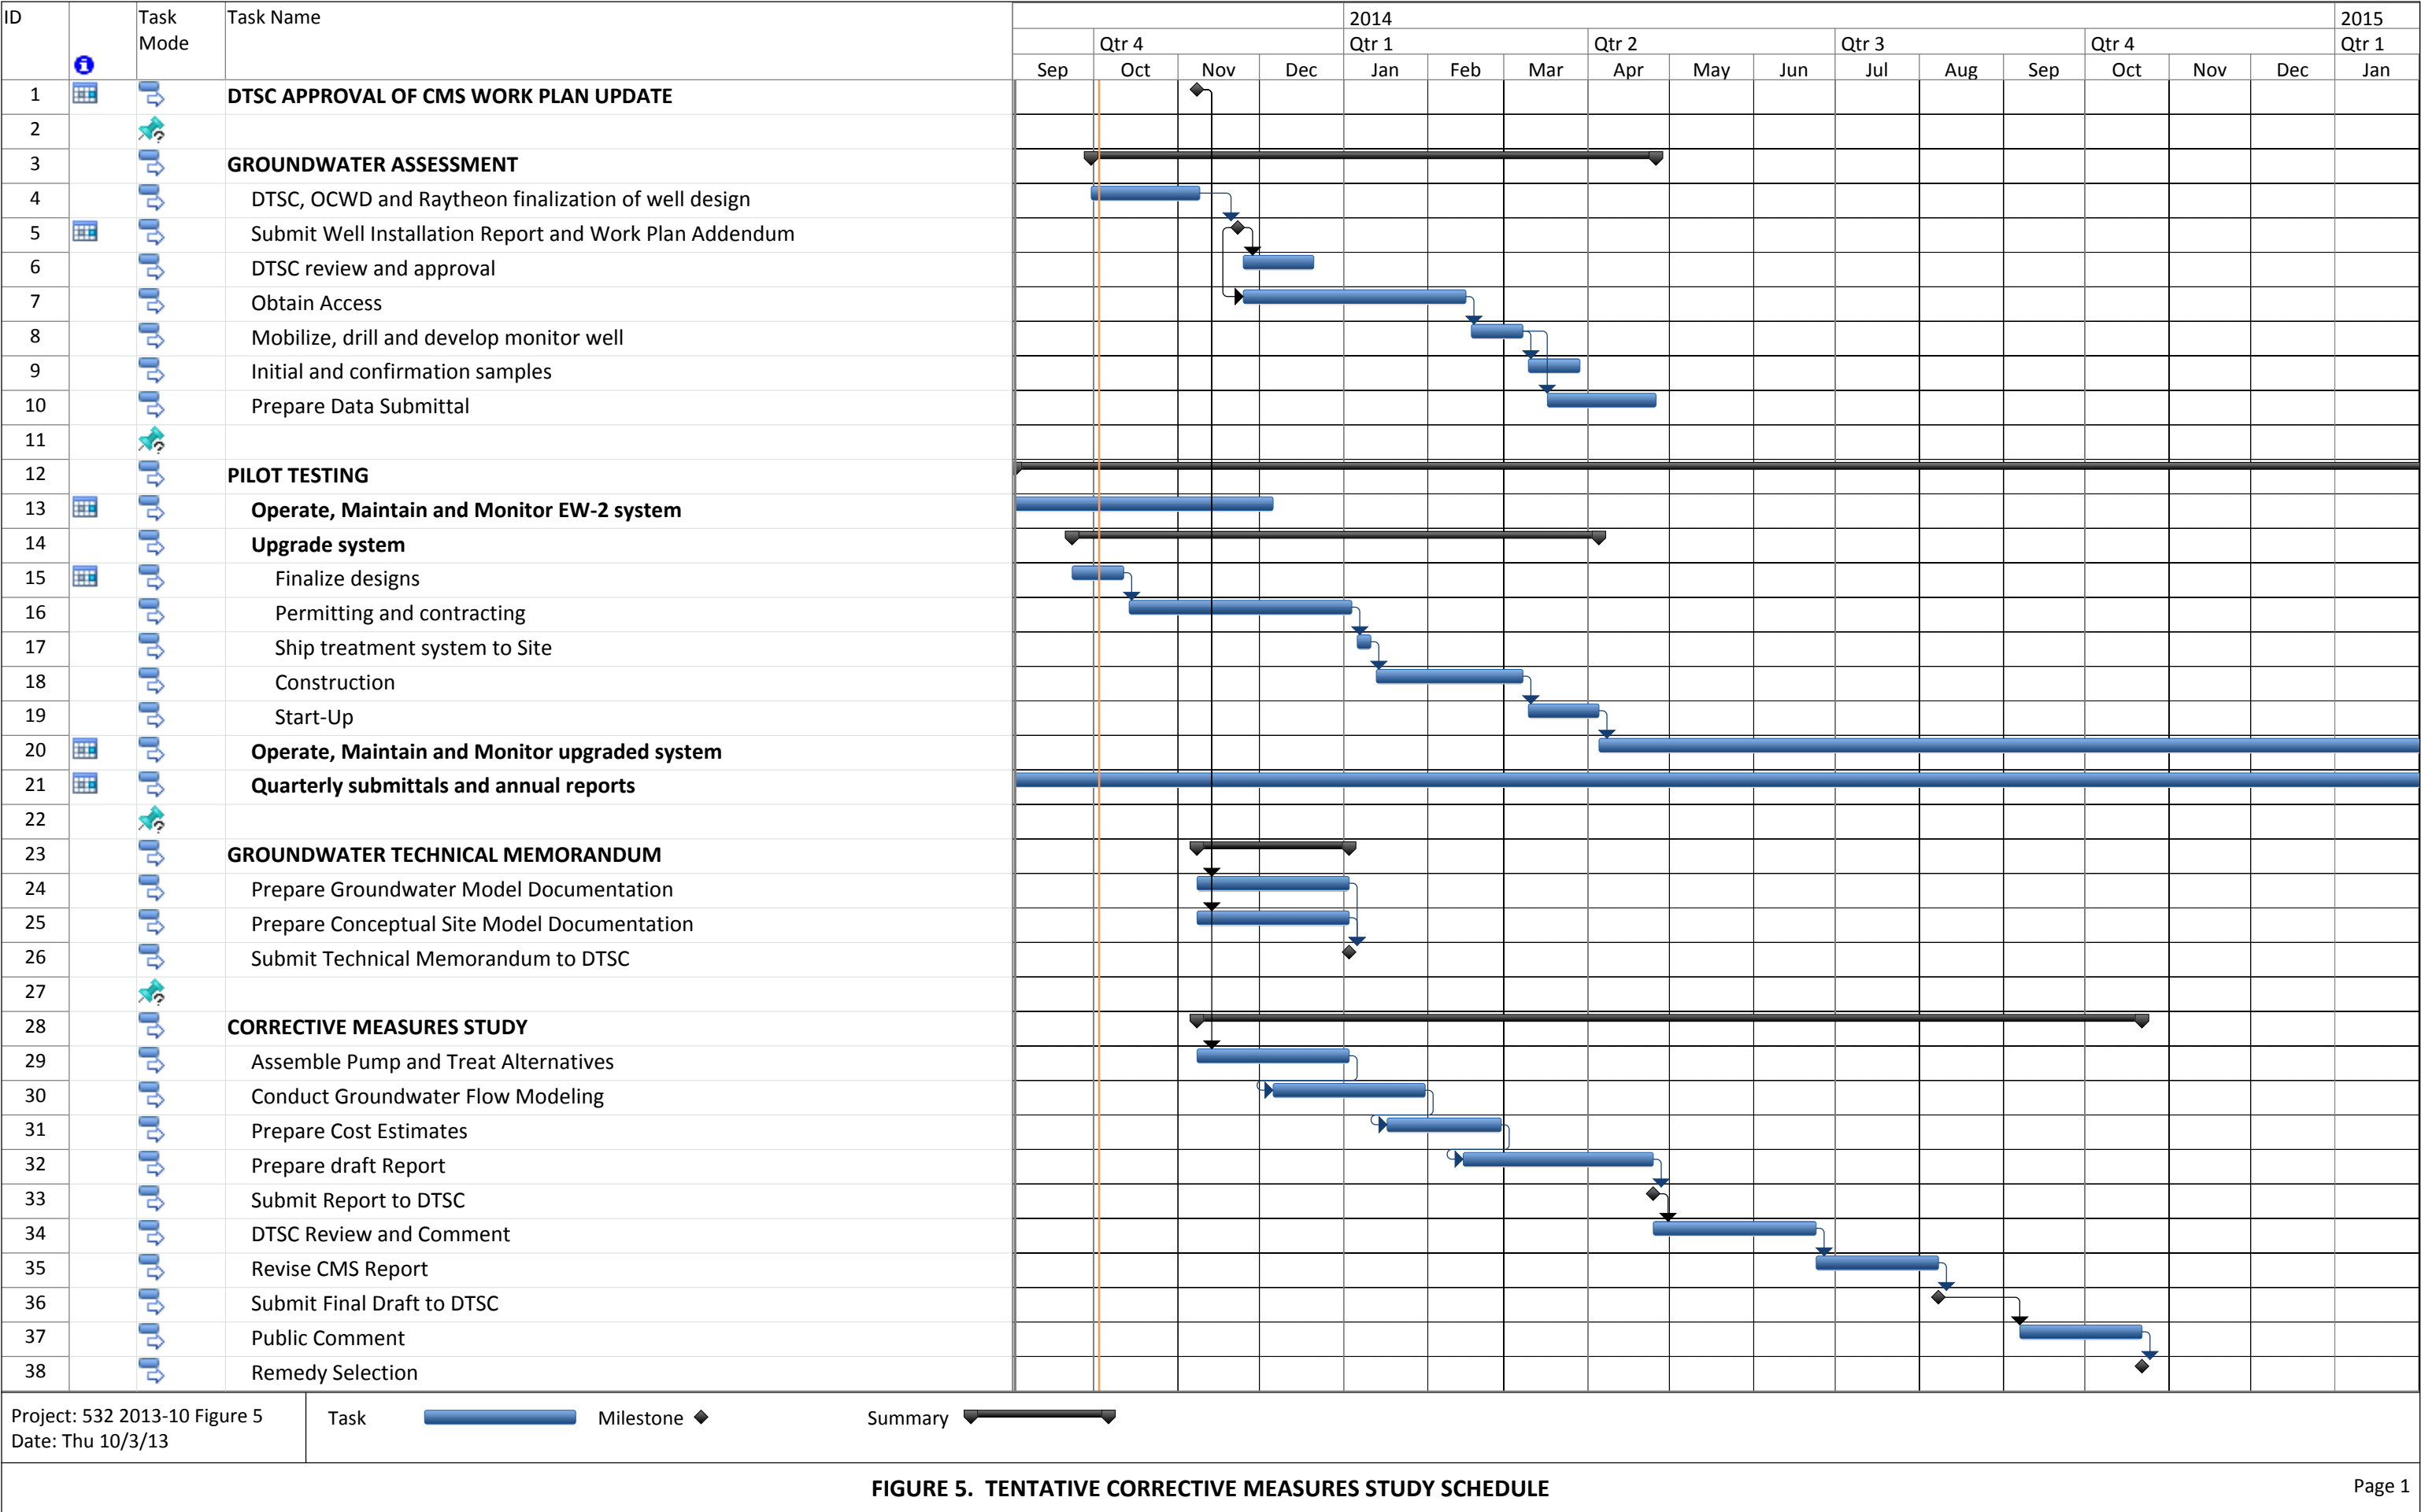



HARGIS + ASSOCIATES, INC.

APPENDIX A

CORRECTIVE MEASURES STUDY REPORT OUTLINE



APPENDIX A

CORRECTIVE MEASURES STUDY REPORT OUTLINE

1. INTRODUCTION
 - 1.1. PURPOSE AND SCOPE
 - 1.2. SITE BACKGROUND
 - 1.2.1. Location and History of Operations
 - 1.2.2. Regulatory History
 - 1.2.3. Geology
 - 1.2.4. Hydrogeology
 - 1.2.5. Summary of Impacts
2. CORRECTIVE MEASURES STUDY
 - 2.1. GROUNDWATER ASSESSMENT
 - 2.2. SITE CONCEPTUAL MODEL
 - 2.3. PILOT TESTS
 - 2.4. GROUNDWATER FLOW MODELING
 - 2.5. PRODUCTION WELL STATUS UPDATE
3. CORRECTIVE ACTION OBJECTIVES FOR GROUNDWATER
4. GROUNDWATER CORRECTIVE MEASURE TECHNOLOGIES
 - 4.1. IDENTIFICATION AND SCREENING OF POTENTIAL TECHNOLOGIES
 - 4.2. DESCRIPTION OF RETAINED TECHNOLOGIES
 - 4.2.1. No Action
 - 4.2.2. Institutional Controls
 - 4.2.3. Monitored Natural Attenuation
 - 4.2.4. Pump and Treat
5. GROUNDWATER CORRECTIVE MEASURES ALTERNATIVES
 - 5.1. CORRECTIVE MEASURE ALTERNATIVE EVALUATION CRITERIA
 - 5.1.1. Protection of Human Health and the Environment
 - 5.1.2. Short-Term and Long-Term Effectiveness
 - 5.1.3. Reduction of Toxicity, Mobility, and Volume/Mass
 - 5.1.4. Implementability
 - 5.1.5. Cost
 - 5.1.6. Green and Sustainable
 - 5.2. CORRECTIVE MEASURE ALTERNATIVES
 - 5.2.1. Alternative GW1: No-Action
 - 5.2.2. Alternative GW2: Monitored Natural Attenuation
 - 5.2.3. Alternative GW3 to GWx Pump-and-Treat (combination of different extraction wellfields, and disposal/reuse of treated groundwater)
6. CONTINGENCIES FOR GROUNDWATER CORRECTIVE MEASURES ALTERNATIVES
 - 6.1. ALTERNATIVE GW2: MONITORED NATURAL ATTENUATION
 - 6.2. ALTERNATIVE GW3 TO GWX: PUMP AND TREAT



APPENDIX A
CORRECTIVE MEASURES STUDY
REPORT OUTLINE (continued)

- 7. RECOMMENDED GROUNDWATER CORRECTIVE MEASURE
 - 7.1. PROPOSED GROUNDWATER CORRECTIVE ACTION OBJECTIVES
 - 7.2. RECOMMENDED GROUNDWATER CORRECTIVE MEASURE
- 8. REFERENCES CITED

APPENDICES

Appendix

- A GROUNDWATER FLOW MODELING
- B CORRECTIVE MEASURES ALTERNATIVE COST ESTIMATES