


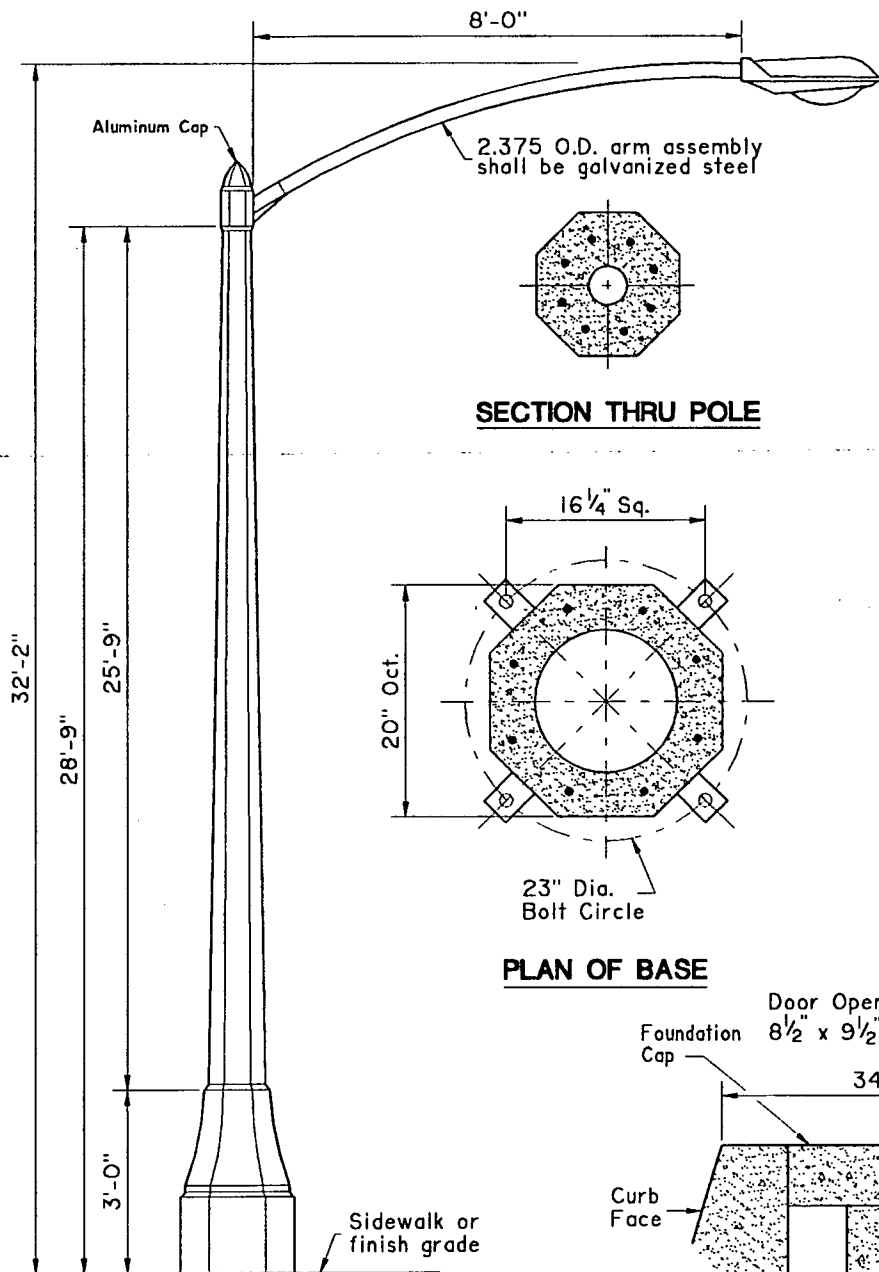

NOTES

1. Standard shall be equipped with High Pressure Sodium Vapor Luminaire with internal ballast and lamp of the wattage specified on the plans.
2. Luminaire shall be the type specified in the City of Fullerton Standard Specifications for Ornamental Street Lighting Systems.
3. Where standard placement reduces clear sidewalk width to less than 48", pole shall be located as directed by the Director of Engineering.

4 Anchor rods
1"x36"x4"

* Locate back of foundation at back of full width 6' sidewalk to provide handicap access.

DRAWN P.L.S.

DATE 8/1/95

STD. NO.

501

CITY OF FULLERTON ENGINEERING DEPARTMENT

PRESTRESSED CONCRETE ELECTROLIER 32' 2" MOUNTING HEIGHT

APPROVED

Robert Hudson
DIRECTOR OF ENGINEERING

DATE 8/16/95

REVISED

DATE