


Fill post with concrete  
(Rounded on top)

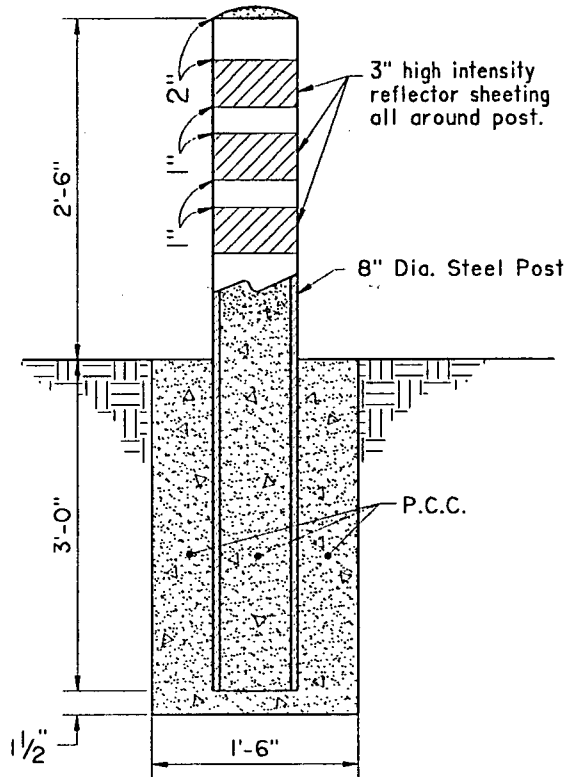

Required to protect signals or street lights adjacent to driveways (Minimum 2 ft. clearance).

Paint with 2 coats of Red Lead Primer and one coat of Imperial Paints Safety (OSHA) Yellow #23-604.

|                                                                  |                                                                                                               |                                         |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <b>REVISED</b><br>DATE _____<br>_____<br>_____<br>_____<br>_____ | <b>CITY OF FULLERTON</b><br><b>ENGINEERING DEPARTMENT</b>                                                     | DRAWN <u>PLS.</u><br>DATE <u>8/1/95</u> |
|                                                                  | <b>TYPICAL GUARD POST</b><br><br>APPROVED <u>Robert Hudson</u> DATE <u>8/16/95</u><br>DIRECTOR OF ENGINEERING | STD. NO.<br><br><b>414</b>              |