
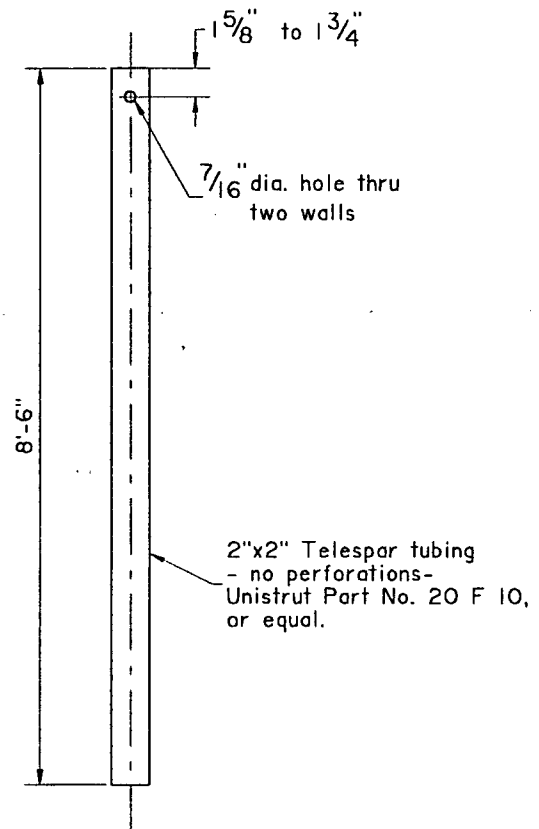


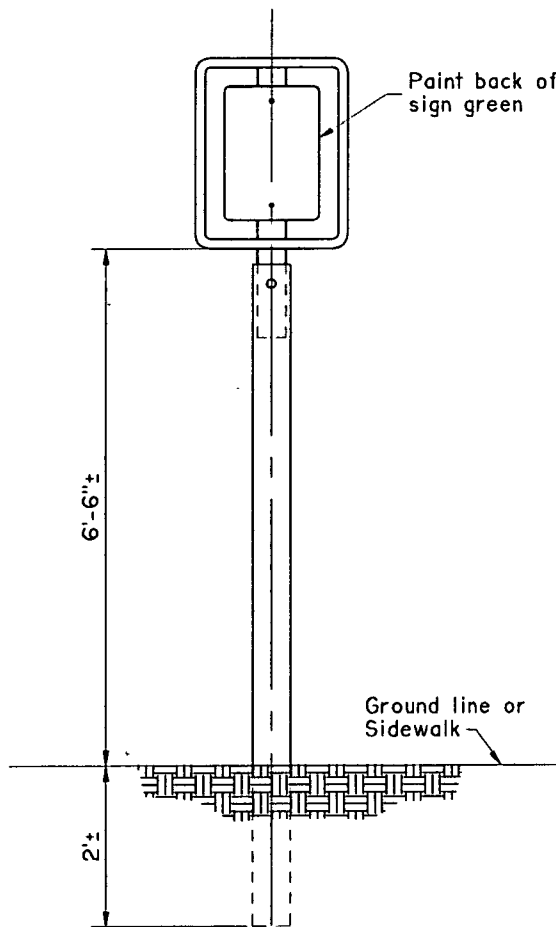

NOTES

1. Finish Perma-Green: Completed unit shall be carefully cleaned and phosphated. Immediately after phosphating, unit shall be coated with an acrylic paint by electrodeposition and then thoroughly baked. Color is Perma-Green per Federal Standard 595-A color number 14109 (Dark Limit V-).
2. De-Burr: All cuts etc. to be de-burred prior to painting.

DRAWN <u>PLS.</u> DATE <u>8/1/95</u>	CITY OF FULLERTON ENGINEERING DEPARTMENT		REVISED DATE _____ _____ _____ _____ _____
	C.B.D. SIGNING SIGN POST		
STD. NO. 424	APPROVED <u>Robert Johnson</u> DIRECTOR OF ENGINEERING	DATE <u>8/16/95</u>	